


## GI ET 4: MT31+A80+GP30 CE

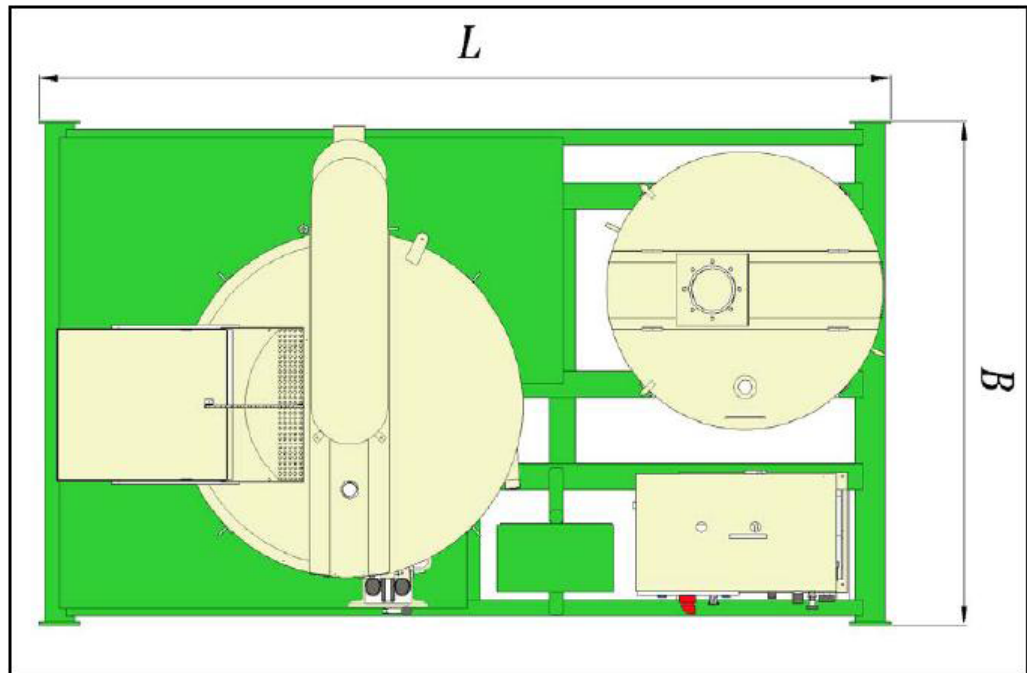

The grout mixing plant GI ET 8 is used to mix and grout water and cement. The electric plant on skid is composed of a turbomixer MT 58 E, an agitator A 80 E, and a grout pump GP 140. The agitator and the turbomixer are controlled from the same electric panel whereas the grout pump is piloted from its own panel. Hydraulic valves regulate the grout pressure and the delivery.

**DIMENSIONS**

Length (L)	3300 mm
Width (B)	1955 mm
Height	1955 mm
Dry weight	1880 kg

**TECHNICAL DATA**

Output per hour	8 m <sup>3</sup>	
Max. pressure	9 MPa	
Max. delivery	140 l/1'	
AGITATOR	Max. capacity	800 l
	Motor	Electric; 1,5 kW ; 50 Hz ; IP65
	Max. speed	22 r.p.m.
TURBOMIXER	Max. capacity	600 l
	Max. delivery	840 l/1'
	Manometric head	18 m
	Motor	Electric; 9,2 kW ; 50 Hz ; IP65
GROUT PUMP	Max. speed	1450 r.p.m.
	Max. delivery	140 l/1'
	Max. pressure	9 MPa
GROUT PUMP	Motor	Electric ; 7,5 kW ; 50 Hz ; IP65